DOT PEEN PORTABLE MARKING SYSTEM e10 p63





- Handy and balanced
- Ergonomic handle
- •Lightweight (3,2 kg 6.1 lbs)
- Marking window 60 x 25 mm 2.4 x 1 in



+ POWERFUL

- Fully programmable
- Latest microcontroller generation: ultra fast start and navigation
- History and self diagnostic functions (maintenance, configuration and statistics support)
- e10 SICTOOL Software Suite: file creation and edition from a PC



- · Marking on difficult to access parts
- Marking speed and power
- Precise and accurate guides
- Marking on all types of materials and difficult surface conditions
- ROBUST AND RELIABLE

•Light and robust cast aluminium body and handle

APPLICATIONS











DOT PEEN MARKING EXAMPLES







TECHNICAL & MECHANICAL FEATURES

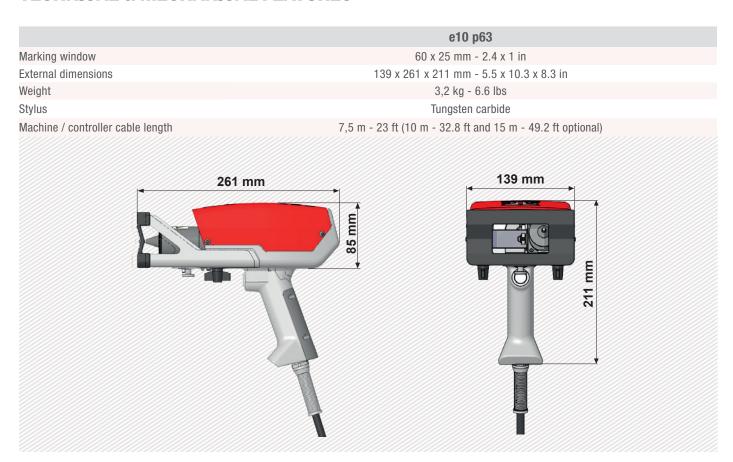

OPTIONS



Cart on battery



Hook and balancing system



Column base



Booster card for deep marking



Magnetic front plate



Maintenance kit



Wireless barcode reader



Datamatrix reader



Rotary axis

Please consult us if a specific configuration is not published in the table attached.

SIC Marking designs customized and turnkey solutions for all industrial sectors. Our design offices produce machines in compliance with your specifications and your industrial standards.

E10 CONTROL UNIT

The e10 controller

- Color screen
- USB Port: to easily upload / download your marking files
- •Fully programmable
- •Standalone (no PC needed)
- Membrane protected industrial Keyboard
- •IP40 waterproof box (no opening or fan)



Technical & electronic features

	e10 Controller
Dimensions	322 x 380 x 112 mm - 13.7 x 15 x 4.4 in
Weight	5 kg - 11lbs
LCD screen resolution	480 x 272 pixels
Keyboard	Qwerty integrated, protected by membrane
Power	300 Watt
Power supply	Single phase, 85 to 260 VAC, 50 to 60 Hz
Controlled axes	2 (optional 3rd / 4th axis card)
Operating temperature	From 5 to 40°C

	Communication
	Communication
Communication ports	RS232, RS422, USB, RS485 Profibus,TCP/IP, Ethernet/IP
Inputs-outputs	8/8
External keyboard input	USB
PC software	Creation of marking files, transfer controller / PC or USB key
Optional communication cards:	


Ethernet TCP








PC UTILITIES

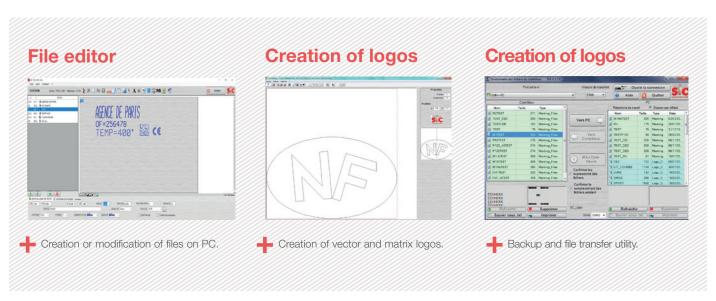

E10 RANGE SOFTWARE

Software features

Text function	Incrementation, date codes
Logos	Download from a PC or USB key
Datamatrix	Up to 348 characters, 48 x 48 dots
Fonts	Arial, Comic, Comic_B, Courier, OCR, OCR_BOLD, OCRA, 4x6
Style	Angular, Radial, Inverse, and Mirror
Character Size	From 0,1 mm to 99 mm (limited following marking window)
Depth	Up to 0,3 mm (according to the material)
Resolution Between Dots	0,05 mm MAX
Password	2 security levels
History function	Exportable Excel file
Help with maintenance	Auto diagnosis
Available languages	17

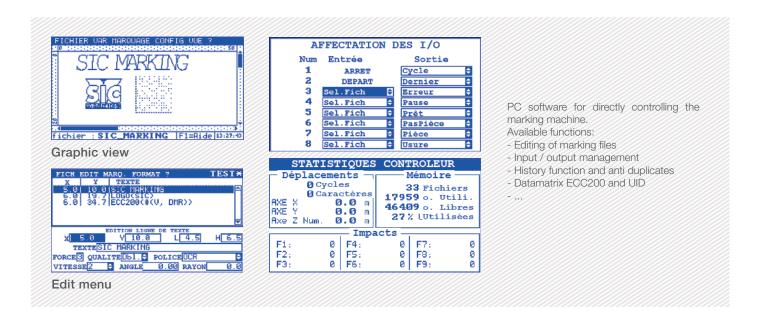

OPTIONAL WINSIC SOFTWARE

